


Futaba®

RADIO CONTROL SYSTEMS, SERVOS AND ACCESSORIES



INNOVATIONS IN TECHNOLOGY FOR SUPERIOR CONTROL

9Z WC2

9-CHANNEL COMPUTER SYSTEMS



Includes
SANYO
Batteries



Stock #	System	Modulation	Bands	Tx Module	Servos	Receiver	Rx NiCd	Tx NiCd
FUTJ9000	9ZA WC2	PCM	50,72	—	—	—	NR4F 1500mAh	NT8S 1100mAh
FUTJ9560	9ZA WC2	PCM	72	TK-FSS	—	R309DPS	NR4F 1500mAh	NT8S 1100mAh
FUTJ9100	9ZH WC2	PCM	50,72	—	—	—	NR4F 1500mAh	NT8S 1100mAh
FUTJ9660	9ZH WC2	PCM	72	TK-FSS	—	R309DPS	NR4F 1500mAh	NT8S 1100mAh

The world's most powerful radio systems

Like the pilots who use them, 9Z World Championship 2 systems represent R/C's elite. Their precision is unmatched, their performance is uniformly flawless and their potential to astound, virtually unlimited. The pilot can specify up to 8 flight conditions per model, a set-up refinement that can unlock a plane's full potential or set up a routine's final piece de resistance with a simple touch of a switch. Transmitter-only versions offer the pilot the possibility to utilize Futaba's existing receivers and Tx modules, while synthesized versions offer the enviable ability to fly on any 72MHz channel. And with both, servo choices are the pilot's sole prerogative.

9Z WC2 Specifics

- Airplane software offers 3 wing types and a unique "ailevator" mix, plus 7 programmed functions and 5 "free" mixes
- Heli software includes gyro sensitivity and governor mixing features, plus 5 "free" mixes and 8 programmed functions
- Sailplane software allows for butterfly and V-tail mixes, plus 7 "free" mixes and 6 programmed functions which include Start Offset & Speed Offset.
- Tachometer reads 1-6 blades, 0-50,000 rpm
- Voltmeter features simulated load
- Auto power-down settable for 10, 20, 30 or 40 minute delays
- Switch control of engine cut-off leaves trim setting intact
- Fail Safe/Hold & Low Voltage Alarms automatically move servos to user-preset positions

9ZH WC2 Helicopter Systems

The 9ZH and 9ZHS offer traditional heli system control layout, a non-ratcheted throttle and these programmable, heli-specific features:

- Dual-Mode Gyro
- U-Shaped Throttle Curve
- Idle-Up (3)
- CCPM Mixing (5)
- Gang Mixing



9Z WC2 System Overview:

- "Stepless" 1024 Resolution
- Assignable Switches
- "Full Functionality" Trainer System
- Software for Airplanes, Sailplanes & Helis
- 10-Model Memory, Expandable w/CAMPac Data Storage Module
- 8 Programmable Flight Conditions/Model
- 5 Programmable Mixes/Model
- 8-Character Model Naming
- LCD w/Adjustable Screen Contrast
- Digital Trims w/Adjustable Rates
- Digital Subtrims (All Channels)
- Servo Centering/Reversing/End Point Adjustment
- Direct Servo Control
- PPM/PCM Operation
- Fail Safe
- Rx and Tx NiCds w/Dual-Output Charger
- Constant Trim, Voltage, Name and Timer Display
- Digital Voltmeter
- Digital Tachometer
- Auto Power-Down
- Independent, Dual Count Up/Down Timers
- Elapsed Time Counter
- Swiveling Antenna
- Dual or Triple Rates (Elevator/Aileron/Rudder)
- Exponential (Elevator/Aileron/Rudder/Throttle)
- Throttle Cut and Idle Down
- Adjustable Travel Limiter (ATL)
- Ball-Bearing Sticks w/Length & Tension Adjustments
- Low-Voltage & Special Mixer Alarms



- Deluxe Carrying Case (FUTM5701)

CAMPac Data Storage Module (64K)

Simple, plug-in module provides data storage for up to 16 more models. (FUTM9400)



9C

9-CHANNEL COMPUTER SYSTEMS

with I6K CAMPac



Includes
SANYO
Batteries



The Innovative Dial 'n Key System: Computer Programming at its simplest!
Just rotate the dial to find the program you want. Press the dial to open it and use the dial and cursor keys to set values.

Stock #	System	Modulation	Bands	Tx Module	Servos	Rx	Rx NiCd	Tx NiCd
FUTJ75**	9CAF	FM	50,72	TP-FM	—	R148DF	NR4J 600mAh	NT8S700B 700mAh
FUTJ76**	9CHF	FM	50,72	TP-FM	—	R148DF	NR4RB 1000mAh	NT8S700B 700mAh
FUTJ77**	9CAP	PCM	50,72	TP-FM	—	R149DP	NR4J 600mAh	NT8S700B 700mAh
FUTJ78**	9CHP	PCM	50,72	TP-FM	—	R149DP	NR4RB 1000mAh	NT8S700B 700mAh
FUTJ85**	9CAF	FM	50,72	TP-FM	(4)S3004	R148DF	NR4J 600mAh	NT8S700B 700mAh
FUTJ86**	9CHF	FM	50,72	TP-FM	(4)S3001	R148DF	NR4RB 1000mAh	NT8S700B 700mAh
FUTJ87**	9CAP	PCM	50,72	TP-FM	(4)S3001	R149DP	NR4J 600mAh	NT8S700B 700mAh
FUTJ88**	9CHP	PCM	50,72	TP-FM	(4)S9001	R149DP	NR4RB 1000mAh	NT8S700B 700mAh
FUTJ89**	9CAP	PCM	75	TJ-FM	(2)S3004	R138DP	NR4J 600mAh	NT8S700B 700mAh

Sophisticated systems for flight and surface use.

Ask modelers about the 9C's best feature, and you'll hear varying opinions. To some, it's the amazing depth and breadth of the things it can do. To others, it's the ability to tap the 9C's full potential with the ease of "Dial & Key" programming. For still others, it's what the 9C surface system can do for robots, huge sailing models and more. But now that a 16K CAMPac Module is a standard 9C feature, all modelers can agree on at least one thing: Futaba's 9C delivers more value and versatility for the dollar than ever before.

9C Specifics

- Airplane software offers 3 wing types and a unique "ailevator" mix, plus 7 programmed functions and 7 "free" mixes*
- Heli software includes gyro sensitivity and governor mixing features, plus 3 "free" mixes and 6 programmed functions*
- Sailplane software allows for butterfly and V-tail mixes, plus 7 "free" mixes and 6 programmed functions* that include Start Offset & Speed Offset
- Servo Test Function shows travel of all 8 servos as they cycle through their limits when "On", allows verification of set-ups/mixes when "Off"
- Auxiliary Channel Screen enables you to reassign functions in a single step
- Slider Switches are assignable to any switch/auxiliary channel function
- Throttle and Pitch Curves can be programmed for up to 5 values
- Square Micro Trainer Plug provides extra plug/port protection

* Using "Advanced" Menu.

9CH Helicopter Systems

With 9CH heli systems, you can program a: 1) level of gyro sensitivity; 2) governor speed; and 3) rate of servo travel for up to 4* conditions — and let the 9C automatically change settings when you change conditions. Non-ratcheted throttle and traditional heli control layout featured.

*5 conditions on gyro sensitivity.



9C System Overview:

- 9 Channels (PCM Mode)
8 Channels in FM Mode
- "Dial & Key" Programming
- 2 Proportional Slide Switches
- Assignable Switches
- "Full Functionality" Trainer System
- Software for Airplanes, Sailplanes and Helis
- Basic and Advanced Menus
- 8-Model Memory, Expandable w/CAMPac Data Storage Module (included)
- 8-Character Model Naming
- 128 x 64 LCD w/Adjustable Screen Contrast
- Digital Trims w/Adjustable Rates
- Digital Subtrims (All Channels)
- Electronic Servo Centering/Reversing/End Point Adjustments
- Direct Servo Control
- PPM/PCM Operation, Fail Safe (PCM Mode only)
- Rx and Tx NiCds w/Dual-Output Charger
- Constant Trim, Voltage, Name and Timer Display
- Independent, Dual Count Up/Down Timers
- Elapsed Time Counter
- Dual or Triple Rates (Elevator/Aileron/Rudder)
- Exponential (Elevator/Aileron/Rudder/Throttle)
- Throttle Cut & Idle-Down
- Adjustable Trim Limiter (ATL)
- Low Voltage and Special Mixer Alarms



Slider switches on both sides of the case can be used without taking your thumbs off the sticks or your eyes off the action. Sound cues confirm servo center.

All 9C systems now include a 16K CAMPac Data Storage Module, which adds 6-model memory to the 8-model memory built-in — memory for 14 models in all!



FUTM9405

9C Surface System



9C surface system offers all of the programming ease and versatility of 9C flight systems on 75MHz with PCM accuracy. Ideal for battling robots, marine masterpieces, big rigs and super-sized custom control applications.

7C

7-CHANNEL COMPUTER SYSTEMS



At last - sport radio systems complete with **DIGITAL** servos!

Futaba's 7C is the first radio system to include digital servos as standard equipment with all versions — airplane, heli, surface, FM, and PCM! Other 7C advantages are its simple Dial 'n Key programming, and the "common sense" structure to its enormous menu of functions: one Basic menu for those you're most likely to need right away...separate Advanced menus for complex airplane and heli set-ups that appeal to well-developed piloting skills.

The 7C is Futaba's new middle ground between 4-channel radios and the "best of the best" 9C — which it nearly equals in sophistication!

7C System Overview



4x

- Large, 72x32 LCD screen with adjustable contrast.
- Ergonomically designed case and adjustable sticks.
- Full-function trainer system (trainer cord not included).
- Mode select.
- Dual rates on 4 channels.
- EEPROM memory to protect settings if Tx battery is disconnected.
- Wall charger for Tx and Rx NiCds.
- Also available: PCM version for surface models (FUTJ72**) and a low-priced aircraft system with standard BB servos (FUTJ69**).



With Futaba's innovative Dial 'n Key, just rotate the dial to find the program you want and press it to open the program. Then, use the dial and cursor keys to set values.

Basic Menu

- 10-model memory
- 6-character model naming
- Dual rate/exponential
- End Point Adjustment
- Sub trims
- Servo reversing
- Trim
- Adjustable throttle cut
- Fail Safe (in PCM mode only)
- Trainer system
- Throttle curve normal (5 points) Heli Mode
- Pitch curve normal (5 points) Heli Mode

Airplane Advanced Menu

- 3 programmable mixes
- Flaperon
- Flap trim
- Air brake
- Elevator to flap
- Flap to elevator
- V-tail mixing
- Elevon mixing
- Aileron to rudder
- Snap Roll

Helicopter Advanced Menu

- Throttle curve (5 points, Idle up 1 & 2)
- Pitch curve (5 points, Idle up 1 & 2)
- Revo mixing
- Gyro
- Hovering throttle
- Hovering pitch
- Throttle hold
- Offset
- 3 Programmable mixes

Stock #	System	Modulation	Bands	Servos	Receiver	Rx NiCd	Tx NiCd
FUTJ69**	7CAF	FM	72	(4) S3004	R127DF	600mAh	600mAh
FUTJ70**	7CAF	FM	72	(4) S3151	R127DF	600mAh	600mAh
FUTJ71**	7CAP	PCM	72	(4) S3151	R138DP	600mAh	600mAh
FUTJ72**	7CAP	PCM	75	(2) S3151	R138DP	600mAh	600mAh
FUTJ73**	7CHF	FM	72	(4) S3151	R127DF	1000mAh	600mAh
FUTJ74**	7CHP	PCM	72	(4) S3151	R138DP	1000mAh	600mAh

6EXA

6-CHANNEL COMPUTER SYSTEM



Includes
SANYO
Batteries



4x

241-Position
Precision
DIGITAL TRIMS



The LCD provides an easy, step-by-step guide to programming and confirmation of every setting. It's all done with just the "Mode" and "Select" buttons and the data input lever.



A flap lever enhances fine control and makes the flap knob easy to find with fingers alone.



Press and hold the trainer switch, and it activates the trainer system. Press and release it twice in one second, and it's a throttle cut switch!

A first computer radio - one great value.

The 6EXA is a great introduction to computer radios and an even better example of the phrase "getting the most for your money." It offers far more than a simple 4-channel system, far more programming ease than you'd ever hoped for — and does it all for less than you could have possibly imagined.

Simple "go-with-the-flow" routines use a big, bright 40-segment LCD to show the shortest and most direct route to each feature. Combine that with two buttons and a data input lever, and the 6EXA becomes a way to accomplish the formerly impossible — a way to lock precise set-ups in multi-model memory with digital accuracy and utter simplicity.

6EXA System Overview

- Easy Programming
- Simple, 2 Button/1 Lever Set-Up
- Stick Mode Selection
- 6-Model Memory
- 4 Programmed Wing Mixes
- Dual-Conversion Receiver
- 241-Position Digital Trims (Throttle/Rudder/Elevator/Aileron)
- 1 "Free" Mix
- Ball Bearing Servos (4)
- EPA and Servo Reversing (All Channels)
- Trainer System/Throttle Cut Switch
- Tx and Rx NiCds w/Dual-Output Charger
- Dual Rates and Exponential (Aileron/Elevator)
- Flap Knob (proportional)
- Audible Low Battery Alarm
- Retract Switch
- Sticks w/Length Adjustment

6EXA System Specifics

- Wing mixes include flaperon, V-tail, flaperon/V-tail and elevon (delta mixing)
- Sticks can be programmed for modes 1-4
- Dual rates and exponential are controlled with a single switch

Stock #	System	Modulation	Bands	Servos	Receiver	Rx NiCd	Tx NiCd
FUTK55**	6EXA	FM	72	(4) S3004	R127DF	NR4J 600mAh	NT8F600B 600mAh

6VH

6-CHANNEL HELI SYSTEM



Digital precision - screwdriver simplicity

To heli pilots more at ease with pots than programming codes, the 6VH represents the perfect blend of simple use and sophisticated performance. A state-of-the-art microprocessor allows pitch curve, throttle hold revolution mixing, idle-up, dual rates and AST values to be fine-tuned to the peak of digital precision, using only the included screwdriver and simple pots and switches.

6VH Overview

- Trainer System
- Rotary knob on Channel 6 offers simple adjustment of hover pitch or gyro sensitivity
- Transmitter Low Battery Alarm
- Adjustable Electronic Trims
- Dual Output Charger

Screwdriver-adjustable

- All-Channel Servo Reversing
- Servo Travel (AST)
- Dual Rates on Elevator & Aileron
- Pitch Curve
- Throttle Hold
- Idle Up



Stock#	System	Modulation	Bands	Servos	Receiver	Rx NiCd	Tx NiCd
FUTK23**	6VH	FM	72	(4)S148	R127DF	NR4RB 1000mAh	NT8IB 600mAh

6YG

6-CHANNEL AIRPLANE SYSTEM



A great way to start out - or move up!

Advanced ergonomics make the 6YG a pleasure to hold. Thoughtful refinements also make it one of the easiest 6-channels to use. Twin pots establish high and low throttle settings with electronic ease, and without mechanical linkages. Dual rates on elevator and aileron are adjustable independently, but controlled by a single switch.

6YG Overview:

- Throttle EPA
- Proportional Flap Channel w/Adjustment Knob
- All-Channel Servo Reversing
- ON/OFF Retract Channel
- Dual Output Charger
- Trainer Port
- Adjustable Electronic Trims
- Battery Meter



Stock#	System	Modulation	Bands	Servos	Receiver	Rx NiCd	Tx NiCd
FUTJ63**	6YG	FM	72,75	(4)S3004	R127DF	NR4J 600mAh	NT8F600B 600mAh

4YF

4-CHANNEL SYSTEM



A new look at low-cost sport/start-up systems

Whether you're a newcomer or a long-time sport pilot, finding a 4-channel system that offers the most for the least takes a surprising short time — especially if you start by looking at the 4YF. It offers the basics of 4-channel control and the ease and economy of NiCd batteries at a price that makes Futaba quality easy to afford.

4YF System Overview

- FM Signal Clarity
- Dual-Conversion FM Receiver
- Ergonomic, Slim-Line Case
- Trainer System
- Ball Bearing S3004 Servos (4)
- Spring-Loaded Trainer Switch
- Red/Green Battery Status LEDs
- Knurled Sticks w/Length and Tension Adjustments
- Tx NiCd w/Dual-Output Charger
- Servo Reversing (All Channels)
- Electronic Trims (All Channels)
- Removable Antenna

4YF Micro



The trainer button has been replaced by a toggle switch that's easier to hold down and spring-loaded to turn off the instant it's released.



Stick length and tension can be adjusted to pilot preference. Knurled tips provide a more tactile feel and better grip.



A right-angle bend and rims around the trainer system plug and port provide strength, reliability and added protection against damage. The port is in the middle of the back panel, to equalize cord weight and keep the cord clear of the controls

4YF



Stock#	System	Modulation	Bands	Servos	Receiver	Rx NiCd	Tx NiCd
FUTJ37**	4YF Micro	FM	72	(2)S3108	R114F	n/a	NT8F600B 600mAh
FUTJ40**	4YF	FM	72,75	(4)S3004	R127DF	NR4QB 600mAh	NT8F600B 600mAh

3FR

3-CHANNEL SYSTEM

Single stick simplicity for sport!

The 3FR offers more than ease and economy — it puts a whole new slant on single-stick design. Mixing is available at the flip of a switch. The case shape and control placement take full advantage of the hand's natural mechanics. Weight is distributed evenly for light, comfortable use. The AM version is a natural match for sailplanes and large electrics — the micro FM version has the super-lightweight on-board components that park and indoor flyers demand. And in both cases, an exceptionally low price makes it a perfect fit for any pilot's budget.

3FR System Overview:

- V-Tail Mixing (On/Off)
- Single-Stick Control (Aileron, Elevator)
- Proportional 3rd Channel (Throttle, Spoiler or Flaps)
- Servo Reversing (Aileron, Elevator)
- Trims (Aileron, Elevator)
- Easy-to-read LED battery status indicator
- NiCd Charge Jack (NiCds optional on FUTJ51**)
- Battery Status LEDs
- Rx battery box, removable antenna, frequency flags, servo horns & hardware, and instruction manual



2x



An inward curve and molded-in recess provide a solid grip during launches and guide your thumb to the slider switch. Ideal for throttle, flaps or spoilers.



Measuring only 0.9" x 0.4" x 0.8" and weighing only .27 oz., the S3108 Micro Servo is ideal for small planes and park flyers.



In addition to servo reversing, the 3FR also offers mixing. Great for elevons, V-tails and Great Planes® Slinger ARF flying wing!

Stock #	System	Modulation	Bands	Servos	Receiver	Rx NiCd	Tx NiCd
FUTJ51**	3FR	AM	72	(2)S3003	R114H	—	—
FUTJ53**	3FR Micro	FM	72	(2)S3108	R114F	—	NT8F600B 600mAh

NOTE: The 3FR FM should not be used on 72MHz low-band channels 11-15.

2DR & 2ER

2-CHANNEL SYSTEMS

For some modelers, using two hands to control two radio channels just feels right — which makes these 2-stick systems a perfect choice. The 2DR is ideal for operating R/C boats and vehicles, the 2ER is great for sailplanes.



2DR and 2ER System Overview

- 2-Channel Servo Reversing
- Conveniently located Steering and Throttle Trims
- Case with molded-in carrying handle
- LED Battery Status Indicator
- Ergonomic Transmitter Case
- Shorter sticks allow smaller hands a full range of movement



The 2ER is available on 72MHz for sailplane use.

Stock #	System	Modulation	Bands	Servos	Receiver
FUTJ22**	2DR	AM	75	(1)S3003, (1)S3802	R132JE
FUTJ23**	2DR	AM	75	(1)S3003, (1)S3801	R132JE
FUTJ25**	2DR	AM	27,75	(2)S3003	R132JE
FUTJ46**	2ER	AM	72	(2)S3003	R122JE
FUTJ60**	4VWD	AM	27	(2)S3003	R114H



4VWD 4-CHANNEL

SURFACE SYSTEM

Add functions (and fun) to your surface model with the 4VWD AM. Engage your robot in exciting combat or enhance the realism of a sailboat. A special “gate” is included that replicates the gear-shifting pattern of tanks.

4VWD System Overview

- 4-Channel Trims and Servo Reversing
- Adjustable Stick Length and Tension
- Battery Power Status Meter



Stock #	System	Modulation	Bands	Servos	Receiver
FUTJ60**	4VWD	AM	27	(2)S3003	R114H

3PK 3-CHANNEL COMPUTER SYSTEMS



Mounted in the rear, the 3PK's custom LCD is perfectly positioned for instant reference and easy programming.



With the Advanced Positioning Adapter, the wheel can be dropped or rotated to achieve perfect "feel" in seconds.

Stock #	System	Modulation	Bands	Tx Module	Servos	Receiver	Rx NiCd	Tx NiCd
FUTJ32**	3PK	FM/HRS	27,75	PK-27/75	—	R203HF	—	NT8F700B 700mAh
FUTJ33**	3PK	PCM	27,75	PK-27/75	—	R113iP	—	NT8F700B 700mAh

Note: Both models require 6.0V Rx power and servos. FUTJ32** requires digital servos.

Twice the speed. All the bells & whistles. No equals.


In top-level racing, speed and accuracy are *everything*. And with the 3PK, it all fits right in the palm of your hand.

Add digital servos to the 3PK equipped with the R203HF receiver, switch it to High Response Speed (HRS) mode, and it will respond at *twice* the speed of any other racing radio.

The 3PK is the only radio that can put HRS mode — and a vast armory of programmable, competitive potential — within easy reach of the serious racer. And it's only from Futaba.

3PK System Overview

- Expandable, 10-Model Memory
- 10-Character Model Naming
- Model Copy, Clear and Reset
- Assignable Switches and Dials
- Digital Trims and Dials
- Automatic Trim and Dial Memory
- "New Driver", "Race-Ready" and "Expert" Menus
- "MC Set-Up" (adapts ESCs to higher HRS frame rates)
- "Adjuster" (restores electronics to original Factory Default)
- "Direct Select" (2-button access to 6 chosen programming functions)
- Backlit, Rear-Mounted 128 x 64 LCD w/Adjustable Contrast
- Advanced Positioning Adapter (APA)
- 2 "Free" Programmable Mixes
- Subtrims (All Channels)
- Servo Reversing (All Channels)
- EPA (All Channels)
- Fail Safe and Battery Fail Safe (HRS & PCM Modes only)
- Right-/Left-Hand Conversion
- DSC (Direct Servo Control)
- Exponential (Steering/Throttle)
- Adjustable Servo Speed (Steering/Throttle)
- Up/Down, Lap & System Timers
- ATL (Electronic & Mechanical)
- Traction Control/Acceleration Rate (Throttle)
- Fail Safe and Auto Start (Throttle)
- ABS (Anti-Skid Brake System)
- Idle-Up
- Tx NiCd and dual-output charger

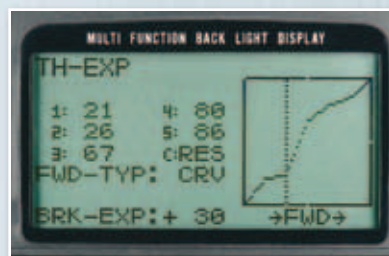

The 128 x 64 (2.5" x 1.25") dot LCD screen provides crisp definition of each number, letter and graph. Backlighting and adjustable contrast maximize visibility in all light conditions.

3PK Specifics

- Up/Down Timers w/Stop and Restart
- Lap Timer features 100 lap memory
- Navigation Lap Timer sounds when target lap time is exceeded
- ABS pulse rate can be set for Slow, Mid or Fast
- "New Driver" Menu offers 12 functions; "Race-Ready" adds 10 new functions; "Expert" adds 9 new functions to "Race-Ready."
- Servo Display Screen shows set-ups/mixes for individual servos. (Expert Menu.)
- Throttle programming options include 5-point curve, Expo & VTR



FUTJ32** includes the R203HF, the only receiver capable of processing signals at the HRS rate — a combination which allows the racer to harness the full speed and accuracy of digital servos.



With a 16K CAMPac Data Storage Module, you can store up to 8 set-ups for copying, storage or transfer to another system. Optional; sold separately. (FUTM9405)

Servo Recommendations by application for HRS (High-Response)

Category	Steering	Throttle
1/8 On-road	S9350	S9350
1/8 Off-road	S9350	S9350
1/10 Nitro	S9451	S9350
1/10 Electric	S9451	ESC
1/12 Electric	S9650	ESC
1/4 & 1/5 Gas	S5050	S9350

3PM-FM & 3PM-FS

3-CHANNEL COMPUTER SYSTEMS



2x



Six different switch locations let you assign the programmable 3rd channel to the position that best suits your driving style. For more easy access, digital trims are placed directly above the wheel, with dual rates on the grip.



Accessing and programming is as simple as pushing these buttons — including being able to set up your car or truck for specific track conditions.

Stock #	System	Modulation	Band	Servos	Receiver
FUTK15**	3PM-FM	FM	27/75	—	R133F
FUTK16**	3PM-FM	FM	75	(1)S3305	R133F
FUTK17**	3PM-FM	FM	75	(2)S3003	R133F
FUTK2000	3PM-FS	FM	27	—	R303FS
FUTK2001	3PM-FS	FM	75	—	R303FS
FUTK2005	3PM-FS	FM	75	(1)S3305	R303FS

The perfect computer radio upgrade for today's monster trucks.

To get the most out of your monster, complement it with the sophisticated computer technology of the 3PM. Advanced electronics mean precision control and razor-sharp response, and the 3PM's many functions are easy to access and program. Plus, it's available with a version featuring a Frequency Synthesizer that lets you switch channels without changing modules or crystals. With this system, your off-roading will never be the same.

3PM System Overview

- Programmable 3rd channel to any of 6 locations/positions
- Alphanumeric LCD screen with high intensity blue LED monitor
- 10-model memory
- Model copy and clear functions
- Model naming
- ABS braking
- Condition switch
- Alarm buzzer
- Brake mixing for large cars
- One-channel program mixing
- Steering and throttle exponential
- Servo reversing on all channels
- End Point Adjustment (EPA) for all channels
- Multi-function timer up/down with lap memory
- Steering dual rates
- Throttle ATL
- Digital trims
- Function select dial/switch
- Steering speed
- Charge jack for optional NiCds
- Special instructions for setting up Traxxas® T-Maxx™ and HPI Savage trucks

The 3PM-FS: adding the convenience of a Frequency Synthesizer.

If you show up at the track and discover another driver using the same channel, no problem. With the 3PM-FS Frequency Synthesizer system, you can change frequencies without changing crystals or modules.



2PL

2-CHANNEL COMPUTER SYSTEMS



The 2-channel digital with 1-button programming!

Cars, boats, trucks of all types — any surface model can benefit from the sophistication and simplicity the 2PL offers. As a sport system, it puts the set-up precision and versatility of computer technology in your hands at a surprisingly low price. And as a computer system, it offers revolutionary programming that replaces complicated controls and routines with push-button ease and an easy-to-follow path.

2PL System Overview

- AM Modulation
- 1-Button Function Selection
- 10-Model Memory
- 3 Character Model Naming
- 64-Character LCD
- Digital Trims (Steering/Throttle)
- Dual Rates (Steering)
- EPA (Steering/Throttle)
- ABS Braking (Throttle)
- Servo Reversing (Steering/Throttle)
- Low-Battery & "Error" Alarms
- NiCd Charging Jack (NiCds optional)
- R142JE BEC Receiver



A push brings up the opening screen; additional pushes take you through the menu to the function you want. Set values with the digital trims, and you're done.



Strategically located, the steering rate switch makes quick adjustments possible, even while driving. Great for establishing solid mid-range control for better cornering.



Trim settings show the direction (Left/Right) and distance from center (0).

The 2PL signals each change in number with a beep — and signals servo center/neutral with two beeps.

2PL Specifics

- Battery Voltage displayed on opening screen — "Low Battery" alarm appears when voltage drops below safe levels
- Holding Edit Key down for 2+ seconds returns user to opening screen
- Trims can be adjusted at any time — not just in menu.
- ABS Braking can be set for Slow, Mid or Fast "pulse" rates — or turned off
- EPA (End Point Adjustments) to limit servo travel can be made to both sides of neutral

Stock #	System	Modulation	Bands	Servos	Receiver	ESC
FUTK01**	2PL	AM	75	(1) S3003	R142JE	—
FUTK02**	2PL	AM	27,75	(2) S3003	R142JE	—
FUTK03**	2PL	AM	75	(1) S3003	R142JE	MC230CR

2PH 2-CHANNEL SYSTEMS



The Basics - and Beyond

There's no denying that a good, basic 2-channel AM pistol is a great place for a first-time modeler to start out. And it's not a bad place for a long-time modeler to end up, either. Both can appreciate the durability and value that the 2PH represents, as well as the easy way it feels in the hand and fits into a budget. And modelers of all skill levels can benefit from the versatility and different capabilities of 2PH systems, and the wide variety of applications they can meet.

2PH Am System Overview:

- Durable composite case has an ergonomic design for modeler comfort
- A heavy-duty wheel post and high, surrounding collar provide a more solid feel
- A wide, flat base distributes battery weight for stability and balanced handling
- A smoked panel over the servo reversing switches and battery LED offers quick access and solid protection

Stock#	System	Modulation	Bands	Servos	Receiver	ESC
FUTJ12**	2PH	AM	75	(1)S3003,(1)S3010	R122JE	—
FUTJ13**	2PH	AM	75	(1)S3003	R122JE	—
FUTJ14**	2PH	AM	27,75	(2)S3003	R122JE	—
FUTJ15**	2PH	AM	27,75	(1)S3003	R122JE	MC230CR
FUTJ58**	2PH	AM	75	(1)S3003	R122JE	Novak Explorer II

Battery Chargers/Dischargers



CR2000 Charger

- Ideal for Tx and Rx packs, as well as glow plug igniters
- Peak charge detection with auto cut-off with audio alert
- Backlit LCD screen displays input/output voltage, charge current, peak voltage and charge time/amount.



FUTM4160

BR2000 Discharger/Cycler

- To check Rx packs, just connect the pack, set for 4.8/6.0/7.2V and push the button
- Colored zones on the circular graph clearly indicate voltage status
- Backlit LCD screen is red when checking, blue when discharging.



FUTM4165

CDR-5000 Charger

- Charges 1-8 cell Tx/Rx packs, as well as 1-36 cell 6 & 7 cell car packs with real time graph plotting; charges at 10A, discharges at 40A.
- Auto cut-off can be programmed for delta peaking, mAh and temperature settings
- All information is shown on a large, backlit LCD screen for virtually "touch free" operation after setup



FUTM4170

Thermo Stand

- Optional Thermo Stand for the CDR-5000 charger provides quick and easy peace-of-mind
- Checks each individual cell's temperature, mAh rating and voltage level
- Great for verifying whether or not packs are matched



FUTM4175


DIGITAL SERVOS

The Pulse Rate of Premium Precision, Power & Performance

By the time a standard servo can react to one signal pulse, the microprocessors in a Futaba Digital Servo have already processed and responded to five more.

A digital servo's signal pulse rate is FET-assisted, and six times faster than a standard servo's rate — a difference that accounts for its virtually instantaneous response, nearly undetectable deadband and frankly enviable abilities to hold a control surface without wavering or fading and come back on-center with amazing ease and absolute accuracy.

Digital and Standard Servo Comparison

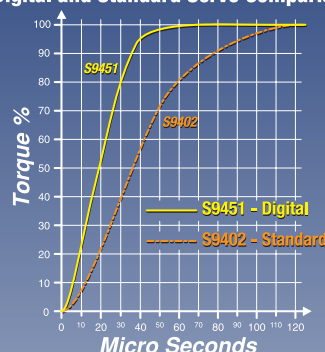

Both servos shown have the same specifications — but the digital servo supplies greater torque toward the center, with more holding power and more accurate positioning.



S3050 Standard High Torque

Volts	Torque	Speed
4.8V	n/a	n/a
6.0V	90.2 oz/in	0.16 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	1.6 oz	

FUTM0300



S3150 Slim

Volts	Torque	Speed
4.8V	51.4 oz/in	0.25 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.1 x 0.5 x 0.8 in	0.78 oz	

FUTM0303



S3151 Sport

Volts	Torque	Speed
4.8V	43.0 oz/in	0.21 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.5 oz	


FUTM0310



S5050 High Torque

Volts	Torque	Speed
4.8V	211.0 oz/in	0.25 sec/60°
6.0V	263.7 oz/in	0.20 sec/60°
Dimensions	Weight	
2.4 x 1.2 x 2.0 in	4.5 oz	

FUTM0255



S9150 Low-Profile Aileron

Volts	Torque	Speed
4.8V	80.5 oz/in	18 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.9 x 1.1 x 1.0 in	1.9 oz	

FUTM0210



S9151 Rudder

Volts	Torque	Speed
4.8V	131.9 oz/in	0.19 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	1.8 oz	

FUTM0211



S9152 Mega High Torque

Volts	Torque	Speed
4.8V	n/a	n/a
6.0V	278 oz/in	0.19 sec/60°
Dimensions	Weight	
1.9 x 1.6 x 1.0 in	2.6 oz	

FUTM0212



S9153 High Speed/High Torque

Volts	Torque	Speed
4.8V	n/a	n/a
6.0V	208 oz/in	0.15 sec/60°
Dimensions	Weight	
1.9 x 1.0 x 1.6 in	3 oz	

FUTM0213



S9154 High Speed Aileron

Volts	Torque	Speed
4.8V	64 oz/in	0.14 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.9 x 1.1 x 1.0 in	1.9 oz	

FUTM0214



S9250 Heli

Volts	Torque	Speed
4.8V	76.3 oz/in	0.11 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	1.9 oz	

FUTM0220



S9251 for GY601 Gyro Only

Volts	Torque	Speed
4.8V	51.4 oz/in	0.07 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	2.0 oz	

FUTM0221



S9252 All-Purpose

Volts	Torque	Speed
4.8V	91.6 oz/in	0.14 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	1.8 oz	

FUTM0222



S9254 Heli High Torque/High Speed

Volts	Torque	Speed
4.8V	47.2 oz/in	0.06 sec/60°
6.0V	n/a	n/a
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.7 oz	

FUTM0224



S9350 High Torque

Volts	Torque	Speed
4.8V	111.0 oz/in	0.15 sec/60°
6.0V	138.8 oz/in	0.12 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.4 oz	

FUTM0235



S9351 High Torque

Volts	Torque	Speed
4.8V	n/a	n/a
6.0V	180.5 oz/in	0.15 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	2 oz	

FUTM0236



S9451 High Torque/High Speed

Volts	Torque	Speed
4.8V	96.6 oz/in	0.13 sec/60°
6.0V	120.8 oz/in	0.10 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	2.0 oz	

FUTM0241



S9550 Low Profile

Volts	Torque	Speed
4.8V	66.6 oz/in	0.14 sec/60°
6.0V	83.3 oz/in	0.11 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.0 in	1.6 oz	

FUTM0250



S9650 Mini

Volts	Torque	Speed
4.8V	50.0 oz/in	0.14 sec/60°
6.0V	62.5 oz/in	0.11 sec/60°
Dimensions	Weight	
1.4 x 0.6 x 1.1 in	0.9 oz	

FUTM0260

Note: For servo application chart, see page 19.

SERVOS

Power and speed for every R/C application.

At Futaba, the application is king — one good reason why more modelers turn to Futaba first for their servo needs. And whether the application requires special sizes, specific torques, better mesh, smoother operation or faster speed, there's a Futaba Servo to meet it — and impact- and fuel-resistant case to protect your investment.



S136G Compact Retract 180°

Volts	Torque	Speed
4.8	91.6 oz/in	0.58 sec/60°
6.0	n/a	n/a
Dimensions	Weight	
1.8 x 0.9 x 1.0 in	1.5 oz	

FUTM0670



S148 Precision

Volts	Torque	Speed
4.8	44.4 oz/in	0.23 sec/60°
6.0	56.9 oz/in	0.19 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.6 oz	

FUTM0710



S3001 Standard

Volts	Torque	Speed
4.8	44.4 oz/in	0.23 sec/60°
6.0	56.9 oz/in	0.19 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.6 oz	

FUTM0029



S3002 Mini

Volts	Torque	Speed
4.8	52.7 oz/in	0.26 sec/60°
6.0	63.8 oz/in	0.21 sec/60°
Dimensions	Weight	
1.2 x 0.6 x 1.2 in	1.2 oz (37g)	

FUTM0030



S3003 Standard

Volts	Torque	Speed
4.8	44.4 oz/in	0.23 sec/60°
6.0	56.9 oz/in	0.19 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.3 oz	

FUTM0031



S3004 Standard

Volts	Torque	Speed
4.8	44.4 oz/in	0.23 sec/60°
6.0	56.9 oz/in	0.19 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.3 oz	

FUTM0004



S3010 Standard

Volts	Torque	Speed
4.8	72.2 oz/in	0.20 sec/60°
6.0	90.2 oz/in	0.16 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	1.4 oz	

FUTM0043



S3101 Micro Precision

Volts	Torque	Speed
4.8	34.7 oz/in	0.18 sec/60°
6.0	43.4 oz/in	0.14 sec/60°
Dimensions	Weight	
1.1 x 0.5 x 1.2 in	0.6 oz (17g)	

FUTM0033



S3102 Aircraft Micro

Volts	Torque	Speed
4.8	51.4 oz/in	0.26 sec/60°
6.0	64.2 oz/in	0.20 sec/60°
Dimensions	Weight	
1 x 0.5 x 1.2 in	0.7 oz (21g)	

FUTM0034



S3103 Micro Mini

Volts	Torque	Speed
4.8	16.7 oz/in	0.11 sec/60°
6.0	20.8 oz/in	0.09 sec/60°
Dimensions	Weight	
0.9 x 0.4 x 0.8 in	0.3 oz (9.5g)	

FUTM0037



S3104 1/4 Scale

Volts	Torque	Speed
4.8	127.7 oz/in	0.21 sec/60°
6.0	n/a	n/a
Dimensions	Weight	
2.4 x 1.2 x 2.0 in	3.4 oz	

FUTM0036



S3107 Micro

Volts	Torque	Speed
4.8	16.7 oz/in	0.12 sec/60°
6.0	n/a	n/a
Dimensions	Weight	
0.9 x 0.4 x 0.8 in	0.3 oz (9g)	

FUTM0025



S3108 Micro

Volts	Torque	Speed
4.8	17 oz/in	0.12 sec/60°
6.0	n/a	n/a
Dimensions	Weight	
0.9 x 0.4 x 0.8 in	0.27 oz (7.6g)	

FUTM0042



S3108M Micro w/Micro Plug

Volts	Torque	Speed
4.8	17 oz/in	0.12 sec/60°
6.0	n/a	n/a
Dimensions	Weight	
0.9 x 0.4 x 0.8 in	0.25 oz (7.3g)	

FUTM0700



S3109M Micro w/Micro Plug

Volts	Torque	Speed
4.8	7 oz/in	0.12 sec/60°
6.0	n/a	n/a
Dimensions	Weight	
0.9 x 0.4 x 0.8 in	0.23 oz (6.5g)	

FUTM0701



S3302 1/4 Scale

Volts	Torque	Speed
4.8	89	0.24 sec/60°
6.0	162.4 oz/in	0.18 sec/60°
Dimensions	Weight	
2.4 x 1.2 x 2.0 in	3.6 oz	

FUTM0035



S3305 Standard High Torque

Volts	Torque	Speed
4.8	98.8 oz/in	0.25 sec/60°
6.0	123.4 oz/in	0.20 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	1.6 oz	

FUTM0045



S3401 High Speed Car

Volts	Torque	Speed
4.8	35.5 oz/in	0.19 sec/60°
6.0	44.4 oz/in	0.15 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.5 in	1.7 oz	

FUTM0040



S3801 High Torque Sail

Volts	Torque	Speed
4.8	155.5 oz/in	0.33 sec/60°
6.0	194.3 oz/in	0.26 sec/60°
Dimensions	Weight	
2.4 x 1.2 x 2.0 in	3.8 oz	


FUTM0038



S3802 Sail


Volts	Torque	Speed
4.8	122.1 oz/in	0.70 sec/60°
6.0	152.7 oz/in	0.56 sec/60°
Dimensions	Weight	
1.8 x 0.9 x 1.7 in	2.6 oz	

FUTM0039



Volts	Torque	Speed
4.8	233.2 oz/in	0.29 sec/60°
6.0	291.5 oz/in	0.23 sec/60°
Dimensions		Weight
2.4 x 1.2 x 2.0 in		4.4 oz

FUTM0051



Volts	Torque	Speed
4.8	188.8 oz/in	0.19 sec/60°
6.0	236.0 oz/in	0.15 sec/60°
Dimensions		Weight
2.4 x 1.2 x 2.0 in		4.4 oz

FUTM0052




Volts	Torque	Speed
6.0	108.8 oz/in	0.6/r sec/60°
7.2	136.0 oz/in	0.5/r sec/60°
Dimensions		Weight
1.8 x 1.0 x 1.8 in		2.9 oz

FUTM0099




Volts	Torque	Speed
4.8	54.1 oz/in	0.22 sec/60°
6.0	72.2 oz/in	0.18 sec/60°
Dimensions	Weight	
1.6 x 0.8 x 1.4 in	1.7 oz	

FUTM0075



Volts	Torque	Speed
4.8	43.0 oz/in	0.18 sec/60°
6.0	n/a	n/a
Dimensions		Weight
1 5 x 0 8 x 1 4 in		1 6 oz

FUTM0085



Volts	Torque	Speed
4.8	50.0 oz/in	0.17 sec/60°
6.0	n/a	n/a
Dimensions		Weight
1 8 x 0 9 x 1 0 in		1 6 oz

FUTM0087




Volts	Torque	Speed
4.8	76.3 oz/in	0.26 sec/60°
6.0	98.5 oz/in	0.21 sec/60°
Dimensions		Weight
1.6 x 0.8 x 1.4 in		1.8 oz

FUTM0090




Volts	Torque	Speed
4.8	131.7 oz-in	0.19 sec/60°
6.0	n/a	n/a
Dimensions	Weight	
1 6 x 0 79 x 1 5 in	1 9 oz	

FUTM0115




Volts	Torque	Speed
4.8	88.8 oz/in	0.13 sec/60°
6.0	111.0 oz/in	0.10 sec/60°
Dimensions		Weight
1 6 x 0 8 x 1 5 in		1 9 oz

EUTM0102



Volts	Torque	Speed
4.8	79.9 oz/in	0.14 sec/60°
6.0	99.9 oz/in	0.11 sec/60°
Dimensions	Weight	
1 6 x 0 8 x 1 5 in	1 9 oz	

FUTM0098



Volts	Torque	Speed
4.8	30.0 oz/in	0.11 sec/60°
6.0	37.5 oz/in	0.09 sec/60°
Dimensions	Weight	
1.4 x 0.6 x 1.2 in.	1.1 oz (31g)	

FUTM0107

■ = Recommended ● = Compatible

SERVO ACCESSORIES

SERVO HARDWARE

Stock #	Part #	Style/Application
FUTM2040	FSH11	Horn Screws & Washers (10)
FUTM2250	FSH32	Mounting Screws & Washers (10)
FUTM2260	FSH41	Horn Screw – 28/29/30/31/32 (10)
FUTM2265	FSH49	Horn Screw for Metal Gear (10)
FUTM2270	FSH44	Horn Screw S33 (10)
FUTM2275	FSH55	Horn Screw S3103 (10)
FUTM2280	FSH51	Self Tap Screw M2.6X10 (10)
FUTM2285	FSH52	Horn Screw M2X6 S125 (10)
FUTM2290	FSH53	Self Tap Screw M3X8 S9150 (10)
FUTM2295	FSH57	Horn Screw S9550 (10)
FUTM2360	FSH9150	Accessory Pack S9150
FUTM3551	FSH50	Accessory Package S3003
FUTM3552	FSH33	Accessory Package S125
FUTM3635	J55043	Ratchet Screw (1) 2DR/VR/CR
FUTM2310	FSH10	Grommets Round (20)
FUTM2320	FSH20	Grommets Square (20)
FUTM2340	FSH40	Grommets Rectangular (20)
FUTM2345	FSH54	Grommets S9150 (10)
FUTM2346	FSH46	Grommets S134/3302 (20)
FUTM2347	FSH47	Eyelets S134/3302 (20)
FUTM2348	FSH48	Grommets Split (20)
FUTM2350	FSH3103	Accessory Package S3103
FUTM3650	FSH21	Eyelets – Brass (20)

NYLON SERVO HORNS

Stock #	Part #	Style/Application
FUTM1835	FSH6H	Horn H S3801
FUTM1980	FSH6E	Horn E - Long Arm S28/48
FUTM2000	FSH6R	Horn C – Disc S28/48
FUTM2010	FSH6S	Horn B – Star S28/48
FUTM2020	FSH6W	Horn D – Wheel S28/48
FUTM2030	FSH6X	Horn A – X S28/48
FUTM2035	FSH6G	Horn G – Disc S34/134/134G
FUTM2038	1M11K12801	Mini Servo Horn A
FUTM2042	FSH9152	Servo Horns S9152/9153
FUTM2045	FSH5801	Horn – Sail Winch Drum S5801
FUTM2258	FSH38	Sail Servo Arm – S3801/125
FUTM2050	FSH59	Adjustable Aluminum Servo Horn



FSH6E



FSH6X



FSH6S



FSH6G



FSH6H



FSH6W

METAL SERVO HORNS

Stock #	Part #	Style/Application			
FUTM2050	FSH59	Adjustable Aluminum Servo Horn			
Airplane Horn	Silver	Gold	Red	Blue	Purple
2" Double	FUTM2100	FUTM2101	FUTM2102	FUTM2103	FUTM2104
1.5" Double	FUTM2105	FUTM2106	FUTM2107	FUTM2108	FUTM2109
1" Double	FUTM2110	FUTM2111	FUTM2112	FUTM2113	FUTM2114
1.5" Single	FUTM2115	FUTM2116	FUTM2117	FUTM2118	FUTM2119
1" Single	FUTM2120	FUTM2121	FUTM2122	FUTM2123	FUTM2124
Car Horn					
20mm Double	FUTM2125	FUTM2126	FUTM2127	FUTM2128	FUTM2129
20mm Single	FUTM2130	FUTM2131	FUTM2132	FUTM2133	FUTM2134



FUTM2132
20mm Single



FUTM2126
20mm Double



FUTM2050
Adjustable Aluminum
Servo Horn

CASE SETS

GEAR SETS

HARDWARE

Servo	Case Set	Stock#	Gear Set	Stock#	Hardware	Stock#
S36G/136G	FCS-36G	FUTM2990	FGS-36G	FUTM3397	FSH-51	FUTM2280
S48/148	UBS-48	FUTM2999	FGS-48	FUTM3400	FSH-41	FUTM2260
S3001	UBS-3001	FUTM2946	FGS-48	FUTM3400	FSH-41	FUTM2260
S3002	FCS-3002	FUTM2935	FGS-3002	FUTM3415	FSH-49	FUTM2265
S3003	UBS-3003	FUTM2939	FGS-3003	FUTM3416	FSH-41	FUTM2260
S3004	UBS-3004	FUTM2942	FGS-3003	FUTM3416	FSH-41	FUTM2260
S3010	FCS-3010	FUTM2948	FGS-3010	FUTM3328	FSH-41	FUTM2260
S3050	TBA	TBA	FGS3050	FUTM3450	TBA	TBA
S3101	FCS-3101	FUTM3050	FGS-3101	FUTM3404	FSH-44	FUTM2270
S3102	FCS-3101	FUTM3050	FGS-3102	FUTM3435	FSH-49	FUTM2265
S3103/06	FCS-3103	FUTM3070	FGS-3103	FUTM3438	FSH-55	FUTM2275
S3104	FCS-34	FUTM2980	FGS-3104	FUTM3352	FSH-41	FUTM2260
S3107	TBA	TBA	FGS-3107	FUTM3358	FSH-55	FUTM2275
S3151	FCS3151	FUTM3072	TBA	TBA	TBA	TBA
S3302	FCS-34	FUTM2980	FGS-3302	FUTM3410	FSH-49	FUTM2265
S3303	FCS-34	FUTM2980	FGS-3303	FUTM3411	FSH-49	FUTM2265
S3305	FCS-3010	FUTM2948	FGS-3305	FUTM3384	FSH-57	FUTM2295
S3401	FCS-3401	FUTM3060	FGS-3401	FUTM3401	FSH-41	FUTM2260
S3801	FCS-34	FUTM2980	FGS-3303	FUTM3411	FSH-49	FUTM2265
S3802	FCS-3802	FUTM2976	FGS-3802	FUTM3398	FSH-49	FUTM2265
S5050	FCS-34	FUTM2980	FGS-5050	FUTM3449	FSH-57	FUTM2295
S5101	FCS-30	FUTM2930	FGS-9101	FUTM3405	FSH-41	FUTM2260
S5102	FCS-33	FUTM2970	FGS-5102	FUTM3402	FSH-49	FUTM2265
S5301	FCS-34	FUTM2980	FGS-5401	FUTM3446	FSH-49	FUTM2265
S5302	FCS-34	FUTM2980	FGS-5302	FUTM3449	FSH-49	FUTM2265
S5801	FCS-5801	FUTM3010	FGS-5801	FUTM3403	FSH-49	FUTM2265
S9001	FCS-9001	FUTM3055	FGS-48	FUTM3400	FSH-41	FUTM2260
S9101	FCS-30	FUTM2930	FGS-9101	FUTM3405	FSH-41	FUTM2260
S9102	FCS-9102	FUTM3000	FGS-9102	FUTM3407	FSH-51	FUTM2280
S9150	FCS-9150	FUTM3166	FGS-9150	FUTM3441	FSH-53	FUTM2290
S9151	FCS-9151	FUTM3057	FGS-9151	FUTM3442	FSH-41	FUTM2260
S9152	FCS-9152	FUTM3071	FGS9152	FUTM3452	TBA	TBA
S9153	FCS-9152	FUTM3071	FGS9153	FUTM3453	TBA	TBA
S9154	TBA	TBA	FGS9154	FUTM3454	TBA	TBA
S9206	FCS-9203	FUTM3067	FGS-9206	FUTM3447	FSH-49	FUTM2265
S9250	FCS-9203	FUTM3067	FGS-9203	FUTM3433	FSH-49	FUTM2265
S9251	FCS-9251	FUTM3068	FGS-9251	FUTM3443	FSH-49	FUTM2265
S9252	FCS-9151	FUTM3057	FGS-9252	FUTM3444	FSH-41	FUTM2260
S9253	FCS-9151	FUTM3057	FGS-9253	FUTM3445	FSH-41	FUTM2260
S9350	FCS-9350	FUTM3005	FGS-9350	FUTM3434	FSH-57	FUTM2295
S9351	TBA	TBA	TBA	TBA	FSH-49	FUTM2265
S9402	FCS-9203	FUTM3067	FGS-9402	FUTM3430	FSH-49	FUTM2265
S9405	FCS-9203	FUTM3067	FGS-9402	FUTM3430	FSH-49	FUTM2265
S9451	FGS-9451	FUTM3069	FGS-9451	FUTM3432	FSH-57	FUTM2295
S9550	FCS-9550	FUTM3015	FGS-9550	FUTM3439	FSH-57	FUTM2295
S9602	FCS-9602	FUTM3065	FGS-9602	FUTM3437	FSH-49	FUTM2265
S9650	FCS-9650	FUTM3431	FGS-9650	FUTM3080	FSH-41	FUTM2260

TBA = To Be Announced

SERVO TRAYS

Stock #	Part #	Style/Application
FUTM2670	FST28T	Standard Tray 2+1 S/48/148/3003
FUTM2675	FST27T	Bulk Tray (No Screws)
FUTM2680	FST28V	Single Vertical Tray S148/3003



FST28T

SERVO CONNECTORS

Stock #	Part #	Style/Application	Length
FUTM3720	FPC8J	J-Type Female Connector	12 in
FUTM3730	FPC8M	J-Type Servo Male Connector	12 in
FUTM3740	FPC8MF	J-Type Servo/Nicd Male Connectors	12 in
FUTM3810	FPC3MF	G-Type Male/Female Servo Connectors	6 in
FUTM3820	FPC8F	J-Type Nicd Male Connector	3 in



FPC8J
J-Type



FPC8M
J-Type



FPC8MF
J-Type



FPC3MF
G-Type




FPC8F
J-Type

GY GYROS



For better-than-piezo gyro performance!

Unlike standard piezo gyros with only a few sensor nodes, GY Gyros feature a cluster of 18 sensor nodes.



It's a big difference in sensor numbers that accounts for GY's amazing improvements in sensitivity and accuracy.

While leaders in other industries were starting to explore the potential of Silicon Micro Machining (SMM), Futaba had already created the first practical application: GY Series Gyros for radio control. SMM allows mechanical and electronic components to be mounted onto a machined, high-density chip that's smaller than a pencil point. The result is a resonator that is shock- and vibration-resistant, far more sensitive and accurate than standard piezo gyros and directly responsible for GY gyros' dramatically superior and exceptionally reliable performance.

- Avoids the temperature sensitivity of piezo crystals — GY Gyros function well within a wide 14°F to 122°F range!
- Reduces start-up time to a virtually instantaneous 3 seconds
- Requires just 80mA of operating current



Only SMM technology could create GY Gyros' incredibly compact, lightweight Active Angular Velocity Control System

- Sends control signals to the gyro servo continuously, even when the tail is not moving
- Trims the rudder against side winds automatically, virtually eliminating the need for rudder trim changes during flight
- Provides the most positive control for hovering and flying in crosswinds

Heli Gyros

GY601 with S9251 Digital Servo



FUTM0820

- Competition gyro ideal for F3C pattern fliers
- Ultra high-speed 330Hz operation
- Gain can be adjusted from transmitter
- LCD screen allows precise setting

Dimensions:
Sensor: 1.3 x 1.3 x 0.71 in (34x34x18mm)
Control Amp: 2.2 x 1.3 x 0.59 in (57x34x15mm)
Weight: 2.1 oz (59g)
Sensor: 0.88 oz (25g)
Control Amp: 1.2 oz (34g)

S9251 Servo Specifications (for use only with the GY601 gyro):
Speed: 0.07 sec. @ 60°
Torque: 51.4 oz-in

GY240



FUTM0809

- Ideal for electrics and .30-size models
- Single-gain adjustable trim

Dimensions: 1 x 1 x 0.8 in (27x27x20mm)
Weight: 0.88 oz (25g)

GY401



FUTM0807
Dimensions: 1 x 1 x 0.8 in (27x27x20mm)
Weight: 0.95 oz (27g)

- Also available with high-speed S9254 digital servo (FUTM0808)
- Ideal for .30-.60 size models
- Gain can be adjusted from transmitter
- Servo travel limit trimmer protects servo linkage

GY502



FUTM0813

- Also available with high-speed S9254 digital servo (FUTM0819)
- Ideal for .60-size helicopters
- High-speed 270Hz operation — four times faster than conventional gyros
- LCD screen allows precise setting

Dimensions:
Sensor: 1.3 x 1.3 x 0.71 in (34x34x18mm)
Control Amp: 2.2 x 1.3 x 0.59 in (57x34x15mm)
Weight: 2.1 oz (59g)
Sensor: 0.88 oz (25g)
Control Amp: 1.2 oz (34g)

Airplane Gyros

GYA-350



FUTM0816

Dimensions: 1.0 x 1.0 x 0.75 in (25x25x19mm)
Weight: 1.0 oz (26g)

- Single servo, single axis gyro for fixed-wing aircraft
- Keeps rudder, nose wheel or tail wheel aligned perfectly with the airplane at all times to reduce wear on landing gear

GYA-351



FUTM0817

Dimensions: 1.0 x 1.0 x 0.75 in (25x25x19mm)
Weight: 1.3 oz (32g)

- Designed for dual aileron applications, such as flaperons
- "Dampens" oscillations and helps the airplane maintain a constant heading

GYA-352 Dual Axis



FUTM0818

An innovative DUAL AXIS gyro for airplanes!

- For simultaneous control of aileron/rudder, elevator/rudder, or aileron/elevator operation
- Also offers elevon mixing circuitry for delta wings and V-tails
- Modelers can adjust gyro axis gain and switch from AVCS to normal mode through the transmitter

Dimensions:
1.7 x 1.7 x 1.2 in (43x30x30mm)
Weight: 1.8 oz (58g)

FUTQ1000
FSH58 Gyro Mounting
Pads 30mm/1.18 in (3)

FLIGHT PACKS

Fly every model in your hangar with just one radio!

Less work than moving equipment from model to model, more affordable than assembling sets piece by piece, Futaba Flight Packs bring together the essentials of on-board gear in a single, convenient package.

All Flight Packs require a receiver crystal.

NOTE: Low Band version can be used only with crystals for Channels 11-35. High Band version can be used only with crystals for Channels 36-60.



Flight Pack Contents

For Ultra-Light Park Flyers

- R124F Receiver
- 2(S3109M) Servos

Low Band FUTL0211
High Band FUTL0236

For Park Flyers

- R114F Receiver
- 2(S3108) Servos

Low Band FUTL0611
High Band FUTL0636

For Airplanes with digital servos

- R127DF Receiver
- 4(S3151) Digital Servos
- Switch Harness
- Aileron Extension
- Servo Accessories
- 1000mAh Rx NiCd (NR4RB)

Low Band FUTL0711
High Band FUTL0736

For Airplanes with ball bearing servos

- R127DF Receiver
- 4(S3004) Servos
- Switch Harness
- Aileron Extension
- Servo Accessories

Low Band FUTL0111
High Band FUTL0136
Note: Rx NiCd required

For Airplanes with ball bearing servos

- R127DF Receiver
- 4(S3004) Servos
- Switch Harness
- Aileron Extension
- Servo Accessories
- 600mAh Rx NiCd (NR4J)

Low Band FUTL0311
High Band FUTL0336

For Helicopters with ball bearing servos

- R127DF Receiver
- 5(S3001) Servos
- Switch Harness
- Servo Accessories
- 1000mAh NiCd (NR4RB)

Low Band FUTL0411
High Band FUTL0436

RADIO FREQUENCY ORDERING INFORMATION

AIRPLANES (72MHZ)						CARS & BOATS (75 MHZ)						6 METER FREQUENCIES (50 MHZ)		AIRCRAFT OR SURFACE (27 MHZ)					
Low Band			High Band			Frequency	Ch.	Frequency	Ch.	Frequency	Ch.	Frequency	Ch.	Frequency	Ch.	Color			
Frequency	Ch.	Frequency	Ch.	Frequency	Ch.	Frequency	Ch.	Frequency	Ch.	Frequency	Ch.			Frequency	Ch.				
72.010	11	72.270	24	72.510	36	72.770	49	75.410	61	75.610	71	75.810	81	26.995	A1	Brown			
72.030	12	72.290	25	72.530	37	72.790	50	75.430	62	75.630	72	75.830	82	27.045	A2	Red			
72.050	13	72.310	26	72.550	38	72.810	51	75.450	63	75.650	73	75.850	83	27.095	A3	Orange			
72.070	14	72.330	27	72.570	39	72.830	52	75.470	64	75.670	74	75.870	84	27.145	A4	Yellow			
72.090	15	72.350	28	72.590	40	72.850	53	75.490	65	75.690	75	75.890	85	27.195	A5	Green			
72.110	16	72.370	29	72.610	41	72.870	54	75.510	66	75.710	76	75.910	86	27.255	A6	Black			
72.130	17	72.390	30	72.630	42	72.890	55	75.530	67	75.730	77	75.930	87						
72.150	18	72.410	31	72.650	43	72.910	56	75.550	68	75.750	78	75.950	88						
72.170	19	72.430	32	72.670	44	72.930	57	75.570	69	75.770	79	75.970	89						
72.190	20	72.450	33	72.690	45	72.950	58	75.590	70	75.790	80	75.990	90						
72.210	21	72.470	34	72.710	46	72.970	59	To order a system on a specific frequency, combine the system's 6-character stock number with the desired channel number. Ex: FUTK5532 = a 6EXA radio on channel 32.											
72.230	22	72.490	35	72.730	47	72.990	60												
72.250	23			72.750	48														
6 Meter frequencies require an FCC amateur radio license for operation.																			

To order a system on a specific frequency, combine the system's 6-character stock number with the desired channel number.
Ex: FUTK5532 = a 6EXA radio on channel 32.

6 Meter frequencies require an FCC amateur radio license for operation.

RECEIVERS, MODULES & CRYSTALS



R122JE – 2-Channel AM w/BEC

Band	Stock #	Xtal St #
27MHz	FUTL0100	FUTL46**
50MHz	n/a	
72MHz Low	FUTL0102	FUTL47**
72 MHz High	FUTL0103	FUTL48**
75MHz	FUTL0104	FUTL49**
Dimensions	Weight	Ant
1.9 x 1.3 x 0.7 in	0.66 oz	39 in



R142JE – 2-Channel AM w/BEC

Band	Stock #	Xtal St #
27MHz	FUTL0200	FUTL46**
50MHz	n/a	
72MHz Low	n/a	
72 MHz High	n/a	
75MHz	FUTL0204	FUTL49**
Dimensions	Weight	Ant
1.7 x 1.1 x 0.7 in	0.56 oz	19.2 in



R133F – 3-Channel FM Micro

Band	Stock #	Xtal St #
27MHz	FUTL0305	FUTL61**
50MHz	n/a	
72MHz Low	n/a	
72 MHz High	n/a	
75MHz	FUTL0309	FUTL64**
Dimensions	Weight	Ant
1.5 x 1.0 x 0.6 in	0.5 oz	19.6 in



R203HF – 3-Channel FM Micro

Band	Stock #	Xtal St #
27MHz	FUTL0340	FUTL61**
50MHz	n/a	
72MHz Low	n/a	
72 MHz High	n/a	
75MHz	FUTL0344	FUTL64**
Dimensions	Weight	Ant
1.5 x 1.0 x 0.6 in	0.63 oz	19.4 in



R113IP – 3-Channel PCM Micro

Band	Stock #	Xtal St #
27MHz	FUTL0300	FUTL51**
50MHz	n/a	
72MHz Low	n/a	
72 MHz High	n/a	
75MHz	FUTL0304	FUTL52**
Dimensions	Weight	Ant
1.7 x 1.1 x 0.4 in	0.7 oz	19.6 in



R114H – 4-Channel AM

Band	Stock #	Xtal St #
27MHz	FUTL0400	FUTL46**
50MHz	n/a	
72MHz Low	FUTL0404	FUTL47**
72 MHz High	FUTL0407	FUTL48**
75MHz	FUTL0408	FUTL49**
Dimensions	Weight	Ant
1.9 x 1.3 x 0.8 in	0.93 oz	39 in



R114F – 4-Channel FM Micro

Band	Stock #	Xtal St #
27MHz	n/a	
50MHz	n/a	
72MHz Low	FUTL0442	FUTL62**
72 MHz High	FUTL0443	FUTL63**
75MHz	n/a	
Dimensions	Weight	Ant
1.3 x 0.8 x 0.5 in	0.36 oz	27.4 in



R124F – 4-Channel FM Ultra Micro

Band	Stock #	Xtal St #
72 MHz Low	FUTL0438	FUTL62**
72 MHz High	FUTL0439	FUTL63**
Dimensions	Weight	Ant
0.6 x 1.3 x 0.64 in	0.3 oz	n/a



R127DF – 7-Channel FM

Band	Stock #	Xtal St #
27MHz	n/a	
50MHz	FUTL0701	FUTL56**
72MHz Low	FUTL0702	FUTL57**
72 MHz High	FUTL0703	FUTL58**
75MHz	FUTL0704	FUTL59**
Dimensions	Weight	Ant
2.6 x 1.4 x 0.8 in	1.4 oz	39.4 in



R138DP – 8-Channel PCM

Band	Stock #	Xtal St #
27MHz	n/a	
50MHz	n/a	
72MHz Low	FUTL0802	FUTL57**
72 MHz High	FUTL0803	FUTL58**
75MHz	FUTL0804	FUTL59**
Dimensions	Weight	Ant
2.6 x 1.4 x 0.8 in	1.4 oz	39.4 in



R148DF – 8-Channel FM Micro

Band	Stock #	Xtal St #
27MHz	n/a	
50MHz	FUTL0811	FUTL56**
72MHz Low	FUTL0812	FUTL57**
72 MHz High	FUTL0813	FUTL58**
75MHz	n/a	
Dimensions	Weight	Ant
2.2 x 1.0 x 0.9 in	1.1 oz	38.8 in



R148DP – 8-Channel PCM Micro

Band	Stock #	Xtal St #
27MHz	n/a	
50MHz	FUTL0821	FUTL56**
72MHz Low	FUTL0822	FUTL57**
72 MHz High	FUTL0823	FUTL58**
75MHz	n/a	
Dimensions	Weight	Ant
2.2 x 1.0 x 0.9 in	1.1 oz	38.8 in



R149DP – 9-Channel PCM

Band	Stock #	Xtal St #
27MHz	n/a	
50MHz	FUTL0901	FUTL56**
72MHz Low	FUTL0902	FUTL57**
72 MHz High	FUTL0903	FUTL58**
75MHz	n/a	
Dimensions	Weight	Ant
2.2 x 1.3 x 0.8 in	1.2 oz	38.8 in



R309DPS – PCM (Synthesized)

Band	Stock #	Xtal St #
27MHz	n/a	
50MHz	n/a	
72MHz Low	FUTL7600	n/a
72 MHz High	n/a	
75MHz	n/a	
Dimensions	Weight	Ant
2.6 x 1.5 x 1.0 in	2.0 oz	43.4 in

Note: "DF" or "DP" indicate dual-conversion receivers. Receivers and crystals are sold separately.

Note: Low = Ch 11-35
High = Ch 36-60

For receivers and discontinued radio systems, visit www.futaba-rc.com

Transmitter Modules

Synthesized modules can transmit on any free channel. All other transmitter modules include a channel-specific crystal.



FUTL15** FUTL8900

System	Band	Stock #	Description
3PJS	27,75MHz	FUTL18**	TJ27/75 FM
3PK	27,75MHz	FUTL13**	RFPK27 FM
3PK	27,75MHz	FUTL14**	3PK AM
9C	50,72MHz	FUTL15**	TP50&72 FM
9Z	50,72MHz	FUTL17**	TK50&72 FM
9Z	72MHz	FUTL8900	9Z FM Synthesized

The stock number for a specific channel is the 6-character stock number plus the channel number.
Ex: FUTL90A1 = 27 MHz set on channel A1.

Receiver Crystal Case

- Black plastic case with molded foam insert to protect delicate crystals.
- Holds 12 crystals and 2 CAMPac data modules (not included).



FUTM4600

Crystals



FUTL91**

FUTL52**

Crystal Sets include both a standard-size transmitter crystal and a receiver crystal.

CRYSTAL SETS	
FUTL20**	Dual Conversion FM Set 50, 72 & 75MHz
FUTL90**	FM Set 27MHz Only
FUTL91**	FM Set 75MHz Only
FUTL92**	AM Set 72 & 75MHz
FUTL93**	AM Set 27MHz
FUTL95**	FM Short Set 27MHz
FUTL96**	FM Short Set 72MHz
FUTL97**	FM Short Set 75MHz

Note: Low = Ch 11-35 High = Ch 36-60

Dual-conversion (DC) crystals are compatible with all Futaba dual-conversion receivers.

Receiver Crystals

Receiver Crystals include either one short or one standard size crystal

RECEIVER CRYSTALS	
FUTL46**	AM 27MHz
FUTL47**	AM 72MHz Low
FUTL48**	AM 72MHz High
FUTL49**	AM 75MHz
FUTL51**	FM 27MHz
FUTL52**	FM 75MHz
FUTL56**	FM DC 50MHz
FUTL57**	FM DC 72MHz Low
FUTL58**	FM DC 72MHz High
FUTL59**	FM DC 75MHz
FUTL61**	FM 27MHz Short
FUTL62**	FM 72MHz Low Short
FUTL63**	FM 72MHz High Short
FUTL64**	FM 75MHz Short

FS-1 Fail Safe Unit

Protect nitro-powered cars, trucks and boats from damage or loss with an FS-1. It constantly monitors operation and reacts instantly to signal loss or interruption by dropping the throttle to a pre-set value. Resets automatically when the signal is reacquired. Requires simple, plug-in installation and works with all Futaba AM and FM radios. Requires 4.8V or 6.0V power and draws only 4mA.

Dimensions: 0.81 x 1.4 x 0.33 in (20x35x10mm)
Weight: 0.23 oz (7g)



FUTM0990

MSA-10 Servo Synchronizer

With the MSA-10, you can synchronize the operation of up to 4 servos and control them all from a single channel. Separate end point and travel adjustments for each servo ease set-up and improve precision. Reversing allows you to mount servos for maximum ease and efficiency. The MSA-10 can be powered by the receiver battery, or by a separate pack.

Dimensions: 0.8 x 1.5 x 0.6 in (21x39x15mm)
Weight: 0.46 oz (13g)



FUTM4155

SR10 Dual Servo Reverser

Ideal for two-servo control surfaces or twin-engine throttles, the SR10 controls two servos from a single channel without the need for special motors or transmitter mixing. Easy to install and equally useful in cars, boats and large-scale aircraft, it features adjustable neutral trim and an RF noise filter for signal clarity.

Dimensions: 0.9 x 1.5 x 0.4 in (23x38x10mm)
Weight: 0.9 oz (25g)



FUTM4150

Electronic Speed Controls

With Futaba Electronic Speed Controls (ESCs), enjoying smooth, proportional control of acceleration is as easy as the push-button set-up that precedes it. Heat sinks, powerful FETs and high-frequency switching provide cool, efficient operation. Both reversible ESCs include a lock-out that allows drivers to move from sport driving to club racing with a touch, while the MC800C Pro provides serious competitors with the features that help win races. All include screwdriver, capacitor, Schottky diode, double-sided tape, power switch and Futaba J connector.



FUTM0922



FUTM0939

- Forward/Reverse/Brake
- 1.5kHz Switching Rate
- 5.0V BEC
- Reverse Lock-Out for sport driving and ROAR-legal racing
- Auto Cut-Off cuts motor power when voltage drops
- Protected against short circuits, current and heat overload
- Signals that receiver is not turned off with sound alarm and vehicle "pulsing"
- Futaba J receiver, Bullet motor and JST battery connectors installed

PA-2 Pilot Assist Link

- Automatically returns planes to level flight

Once the PA-2 is installed, gusty winds and pilot error can't knock planes off course and out of control. Its sensors detect deviations from level flight, and automatically use elevator and aileron to restore the plane to true horizontal. Sensitivity adjusts from 0-100%. Draws just 5 mA w/4.8V power. PA-2 includes amplifier and sensor.

FUTM0999 PA-2 Pilot Assist Link

FUTL0995 PAR-2 Pilot Assist Link w/RX 72L

FUTL0996 PAR-2 Pilot Assist Link w/RX 72H

FUTL0998 PAR-25 AFS 4Ch w/RX 72H



FUTM0999



Amp Dimensions:
2.1 x 1.3 x 0.6 in (54x34x15mm)
Weight: 0.9 oz (25g)

Sensor Diameter: 1.3 in (33mm);
Weight: 0.5 oz (15g)

GV-1 Governor

- More precise, consistent control — automatically!

The GV-1 turns on and off from the throttle stick and holds rpm to within +/- 1% of the value you set. Works in a 1,000-2,100 rpm range. Includes control amp, sensor, mounting brackets for .30 and .60 models, magnets and a small screwdriver. Requires 3.8-6.0V power and draws 40mA @ 4.8V. Sensor Magnet Bracket includes all GV-1 parts except control amp.

Sensor: 0.3 x 0.4 x 0.6 in (7.6x10x15mm)
Control Amp: 2.2 x 1.2 x 0.6 in (56x30x15mm)
Weight: 1.34 oz (38g)

FUTM1101 GV101 Sensor Magnet Bracket

FUTQ1000 FSH58 Gyro Mounting Pads 30mm (3)



FUTM1001

MC800C Pro




FUTM0939

- Forward/Brake
- 3.1kHz Switching Rate
- 5.7V BEC
- Power Control offers digital mastery of traction and acceleration
- Power Start provides instant, full-power starts
- Neutral Brake "taps" brakes when throttle is released
- Hyper Brake adjusts minimum/maximum brake action to driving style
- External solder points for motor and battery leads

Worlds Kit

- High-end enhancement for the MC800C Pro
- Includes high-power large and small capacitors, redesigned heat sink head, heat shrink tubing and decal sheet.



FUTM0940

Stock #	Model #	Dimensions	Weight	Capacity	Motor Limit	Current (fwd/rev)	Wire
FUTM0922	MC230CR	1.07 x 1.31 x 0.50 in (28x33x13mm)	1.55 oz (44g)	6-7 cells	20+ turns	90A/45A	16 ga.
FUTM0932	MC330CR	1.07 x 1.31 x 0.50 in (28x33x13mm)	1.59 oz (45g)	6-7 cells	15+ turns	200A/100A	14 ga.
FUTM0939	MC800C Pro	1.1 x 1.0 x 0.57 in (28x25x14mm)	0.62 oz (18g)	4-7 cells	5+ turns	235A/n/a	12 ga.

Extensions & Charge Cords



FUTM4149



FUTM3900

Stock #	Part #	Description	Length
FUTM3900	AEC1	G-Type Servo Extension	9 in
FUTM3910	AEC3	J-Type Servo Extension	9 in
FUTM3955	AEC11	J-Type Servo Extension	16 in
FUTM4110	AEC9	Servo Adapter J Sx to G Rx	6 in
FUTM4120	AEC10	Servo Adapter G Sx to J Rx	6 in
FUTM4125	AEC12	J-Type Servo Extension	39 in
FUTM4130	AEC13	J-Type Dual Servo Extension	6 in
FUTM4135	AEC16	J-Type Heavy Duty Servo Extension	6 in
FUTM4140	AEC14	J-Type Heavy Duty Servo Extension	8 in
FUTM4145	AEC15	J-Type Heavy Duty Servo Extension	16 in
FUTM4147	AEC17	J-Type Heavy Duty Servo Extension	22 in
FUTM4148	AEC18	J-Type Heavy Duty Servo Extension	40 in
FUTM4149	AEC19	J-Type Servo Extension w/filter	8 in
FUTM4221	NCC13	Transmitter Charge Cord	60 in
FUTM4231	NCC14	Receiver Charge Cord	60 in




J-Type
Connector



G-Type
Connector

Switch Harnesses

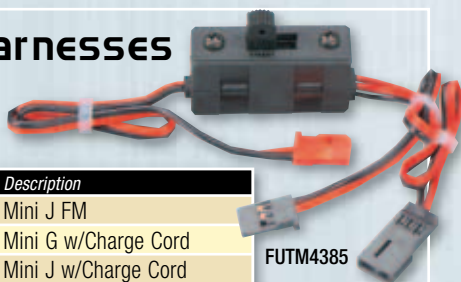

FUTM4385

Stock #	Part #	Description
FUTM4350	SWH7	Mini J FM
FUTM4360	SWH8	Mini G w/Charge Cord
FUTM4370	SWH13	Mini J w/Charge Cord
FUTM4380	SWH10	Mini G w/BEC Connector
FUTM4382	SWH12	Mini J w/BEC Connector
FUTM4385	SWH14	Heavy-Duty J w/Charge Cord

DSC Cords



FUTM4245

With a Direct Servo Control (DSC) cord, you can test servo response without sending a signal — great for last-minute adjustments in the pits.

Stock #	Part #	Description
FUTM4243	NCC9	DSC Cord w/Charge Adapter 9V/9Z
FUTM4244	NCC12	DSC Cord 9C
FUTM4245	NCC10	DSC Cord 3PB/3PK
FUTM4250	DCC11	DSC Cord 3UC/9Z

Miscellaneous



Neck Strap FUTM5692



Clip on Screwdriver
FUTM5685



Tx Neck Strap, Black FUTM5690

Radio Cases & Bags



- Brushed-aluminum exterior w/foam-padded interior.
- Lockable latches. 2 keys



Double Transmitter Case (FUTM5705)
Measures: 12.8 x 7.9 x 10.3 in
(450x200x260mm)

Single Transmitter Case (FUTM5701)
Measures: 16.5 x 12.3 x 6.6 in
(420x310x170mm)

3PK Metal Transmitter Carrying Case
(FUTP1010)

Measures: 15 x 10.6 x 6.3 in



3PK Transmitter Bag (FUTP1000)

Created for the 3PK, but movable foam blocks allow use with any 2- or 3-channel pistol. Black nylon construction w/rigid sides, carrying handle and adjustable shoulder strap. Measures: 15 x 8.8 x 6 in (380x220x150mm)

Aircraft System Transmitter Bag (FUTP1005)

Dual zippers open the top of this soft-side, black nylon bag to receive most stick radios. Features carry strap on top, plus side pouch. Measures: 8.4 x 4.5 x 10 in (210x115x255mm)



Antennas



Transmitter Antennas		
ANT5	FUTM5040	3PM/4VF/YF/NBL, 6YG/X/EXA, 7C
ANT6	FUTM5050	4L, 5LK, 6NPK/NFK/VH
ANT8	FUTM5070	G SERIES PCM
ANT11	FUTM5100	3PG LONG ALL FREQ
ANT12	FUTM5110	9C/V/Z, 8SS/U
ANT13	FUTM5111	2CR/DR/FR/PC/PCKA/PEKA/PH, 3FR
ANT14	FUTM5112	3PJ
ANT15	FUTM5113	3PDFX
1M14306501	FUTM5115	3PK
1M14E05401	FUTM5116	2PL

Receiver Antennas		
FUTM1600	AL0125 AM	19.7" (500mm)
FUTM1610	AL0142 AM	39.4" (1000mm)
FUTM1620	AL0146 FM	43.3" (1100mm)

NiCds

Quality Futaba Systems - Genuine Sanyo® NiCds!



Sanyo® NiCd battery packs are standard equipment in more and more Futaba radio systems and the standard in R/C radio power

everywhere. Cells are welded to ensure strong connections before being shrink-wrapped and equipped with lead and connector. Ready for instant use — and long life — Sanyo NiCds.

Receiver NiCds

Most packs include a Futaba J connector. Exceptions noted.

-  **NR4K** (FUTM1210)
4.8V/250mAh
1.3 x 2.3 x 0.58 in (32x58x15mm)
2.0 oz (57g)
-  **NR4M** (FUTM1290)
4.8V/500mAh w/G connector
2.0 x 2.3 x 0.6 in (51x58x15mm)
3.4 oz (95g)
-  **NR5F600** (FUTM1381)
6.0V/600mAh
1.3 x 3.4 x 0.7 in (32x85x18mm)
3.5 oz (100g)
-  **NR4J** (FUTM1280)
4.8V/600mAh
2.0 x 2.3 x 0.6 in (51x58x15mm)
3.4 oz (95g)
-  **NR4QB** (FUTM1295)
4.8V/600mAh
1.1 x 2.0 x 1.1 in (28x51x28mm)\
3.4 oz (95g)
-  **NR5T600** (FUTM1383)
6.0V/600mAh
1.2 x 2.0 x 1.3 in (31x51x32mm)
3.5 oz (100g)
-  **NR4F1500** (FUTM1285)
4.8V/1500mAh
1.9 x 2.8 x 0.74 in (47x69x19mm)
4.1 oz (116g)
-  **NR4RB** (FUTM1380)
4.8V/1000mAh
1.9 x 2.8 x 0.74 in (47x69x19mm)
4 oz (112g)
-  **NR5RB** (FUTM1385)
6.0V/1000mAh
1.9 x 2.1 x 1.3 in (47x52x33mm)
5.0 oz (141g)

Transmitter NiCds

-  **NT8A**
(FUTM1415)
9.6V/700mAh
w/5-pin connector
4.8 x 1.4 x 1.4 in
(119x34x36mm)
-  **NT8CG**
(FUTM1420)
9.6V/500mAh
w/G connector
4.6 x 1.3 x 1.3 in
(115x32x32mm)
-  **NT8H**
(FUTM1430)
9.6V/500mAh
w/2-Pin connector
5.9 x 0.6 x 1.7 in
(148x15x43mm)
-  **NT8F1000**
(FUTM1435)
9.6V/1000mAh
w/2-pin connector
4.5 x 0.56 x 2.1 in
(112x14x52mm)
-  **NT8F600B**
(FUTM1440)
9.6V/600mAh
w/ J connector
4.5 x 0.56 x 2.0 in
(112x14x51)
-  **NT8LP**
(FUTM1450)
9.6V/500mAh
w/9V connector
4.4 x 1.2 x 1.2 in
(111x30x31mm)
-  **NT8S600B**
(FUTM1457)
9.6V/600mAh
w/J connector
4.1 x 1.3 x 1.2 in
(103x32x30mm)
-  **NT8S700B**
(FUTM1460)
9.6V/700mAh
w/J connector
4.1 x 1.3 x 1.2 in
(103x32x30mm)
-  **NT8F700B**
(FUTM1462)
9.6V/700mAh
w/J connector
4.5 x 0.56 x 2.0 in
(113x14x51)
-  **NT8JY2**
(FUTM1463)
9.6V/600mAh
w/2-pin connector
4.5 x 0.6 x 2.0 in
(112x15x51mm)
-  **NT8IB**
(FUTM1465)
9.6V/600mAh
w/J connector
4 x 1.1 x 1.2 in
(100x28x29mm)
-  **NT8S1100**
(FUTM1470)
9.6V/1100mAh
w/5-pin connector
4.8 x 1.4 x 1.4 in
(119x34x36mm)

Dual-Output Chargers

- The easy, "set & forget" way to charge a single pack or a Tx and Rx pack together overnight.



FUTM1830

Stock #	Model #	Application	4.8V rate	9.6V rate
FUTM1830	FBC19B4	All NiCd-equipped systems except 9Z WC2 and 9C	100mA	70mA
FUTM1825	FBC29A4	All 9Z WC2 systems w/1500mAh Rx & 1100mAh Tx NiCd packs	150mA	100mA
FUTM1820	FBC6B4	All 9C systems w/600 or 1000mAh Rx and 700mAh Tx NiCd Packs	100mA	50mA

Apparel

Official Futaba Hat

Lightweight, 100% cotton cap offers good looks, eye protection and easy washing.

Plastic strap adjusts to fit virtually any head. Off-white, with dark green Futaba logo, bill & air holes. (FUTZ7087)



A

B

Futaba Shirts

Made from 100% cotton, Futaba polos and tees provide cool, comfortable wear and a choice of looks. Classic, short-sleeve **Polo** (A) features an off-white body and dark green trim, with the Futaba name printed on both sides of the shirt. **T-Shirt** (B) is off-white with dark green trim and has Futaba's bold maroon/green racing logo across the chest.



Futaba Polo Shirts

FUTZ7076	Medium
FUTZ7077	Large
FUTZ7078	FX-Large
FUTZ7079	XX-Large

Futaba T Shirts

FUTZ7083	Medium
FUTZ7084	Large
FUTZ7085	X-Large
FUTZ7086	XX-Large

Promotional Items

MonoKote® Trim Sheet Decals

These self-adhesive Futaba logos offer the ease of cut, place and press application and the rich, lasting colors of Top Flite® MonoKote! Car versions offer 7 sizes on a 17-3/4" x 5" (450x125mm) sheet. Air versions provide 10 sizes on a 36" x 5" (910x125mm) sheet.



MonoKote Trim Sheet — Small (FUTZ3500)



4-Color — (FUTZ3503)



MonoKote Trim Sheet — Large (FUTZ3501)



3-Color — Large (FUTZ3504)

Banner

Heavy-duty Tyvek sign w/brass-reinforced holes for hanging.



Tyvek Banner 4'x1' (FUTZ3510)



Trainer Box

It's an inexpensive, hands-on learning tool for individuals and a great investment in future members for flying clubs. Linked to the instructor's radio with a trainer cord (sold separately), the Trainer Box allows the student to practice with confidence and allows the instructor to assume control instantly if the need arises. Compatible with all current Futaba aircraft systems.

FUTM4375

Trainer Cords

The learning link between student and instructor! Available in 3 connector combinations that can make any two current Futaba aircraft systems a teaching-learning pair.



M-T-FM Cord (FUTM4410)
Round/Round
For: most earlier Futaba radios



MDTC Cord (FUTM4420)
Round/Square Micro
For: Connecting 9C, 4YF, 6EXA or 4-TH radios to "round plug" systems




MMTC Cord (FUTM4415)
Square Micro/Square Micro
For: Futaba 9C, 6EXA, 4YF & Tower Hobbies® 4-TH

Dry Cell Cases



S30050 (FUTM1560)
UM3 Tx Battery Case 8-Cell Dry
For: 2P/KA, 3PB



(FUTM1563)
Dry TX Battery Holder 3PK
Dry "AA" Tx Battery Holder 8-cell
For: 3PK



S30055 (FUTM1565)
Tx Battery Case 7-Cell
For: 2PD/F, 3PB, 5UAF/P, 6NHP, 7UAF/P/PS/PS



10730 (FUTM1580)
Slant Tx Battery Case
For: 2PB/KA



FBB1 (FUTM1590)
Dry 4-Cell Rx Case
BEC Connector
For: 2ER/FR/PH/PHKA, 3FR



FBB2 (FUTM1595)
Dry 4-Cell Rx Case
J Connector
For: 3PK

Futaba®

More modelers insist on Futaba.

Nearly everyone you meet at the track, pond or flying field owns a Futaba radio. The reason? Simple. No matter what your priorities are — price, ease of use, access to innovative programming functions for highly customized control — a Futaba system is available to bring out the best in you and your model.



Specialists in fast, friendly service.

In the unlikely event that your Futaba equipment ever requires service, you can count on Futaba's exceptional Service Center to get you back into action fast.

Staffed by expert technicians and equipped with the most advanced diagnostic tools, the Service Center gives your Futaba radio system the knowledgeable care that it deserves. If a repair is needed, they get it right the first time.

And the Service Center's location in the central United States means that shipping to most areas of the country takes only two days. You get your return package fast — without paying high overnight shipping charges.

Futaba Service Center USA
3002 N. Apollo Dr. Suite 1, Champaign, IL 61822



Visit Futaba online.



Looking for details about Futaba's selection of radios, servos, parts and accessories? It's all as close as your computer.

www.futaba-rc.com

One Year Limited Warranty

Futaba digital proportional R/C systems are warranted to the original purchaser for one full year from the date of purchase against defects in material and workmanship. During this period Futaba will repair or replace, at our discretion, the defective component.

This warranty does not apply to improperly installed, handled, or abused systems, radios which have been damaged in a crash, nor to any unit which has been repaired or altered by unauthorized agencies. Under no circumstances will the buyer be entitled to consequential or incidental damages. This limited warranty gives you specific legal rights; you may have other rights which vary from state to state. Batteries and plastic housings are not covered by warranty.

This warranty applies to Futaba products purchased and used in the United States, Canada, and Mexico.